

WARNING! Buyer/user assumes all responsibility for safety and proper use not in accordance with the directions and safety labels.



HO T5 4 Lamp Lighting System Hanging Kit

IMPORTANT WARNING AND SAFEGUARDS

Read and follow the guidelines to ensure the proper use and application. Failure to follow these guidelines may result in light hood damage, aquarium damage, electrical shock, fire and/or injury.

1. Use this product for its intended use only.
2. Never yank or pull the cord from the electrical outlet.
3. Do not place the light hood directly on top of the aquarium.
4. Do not operate if the plug or wire is damaged.
5. Do not mount to dry wall.
6. The light hood is not to come in contact with water.
7. The light hood must be turned off/disconnected from the power supply before any maintenance is done to either the Retrofit Kit or the aquarium.
8. Verify that hands are dry prior to disconnecting the power.
9. To reduce the risk of electrocution keep all connections dry.
10. If the light hood falls or comes in contact with water/excess moisture, unplug the Retrofit Kit from the power supply immediately before removing. Failure to do so may cause electrical shock or injury.
11. The light hood and connections need to be free of water, moisture and salt build up at all times. Failure to do so will cause electrical arcing resulting in possible fire or electrical shock.
12. Do not place light hood above an open top aquarium

Use and/or consult a professional electrician or general contractor for installation

INSTALL TO THE CEILING

Follow all safeguards, instructions and warning that where provided with the light hood. Failure to properly install mounting hanging kit can cause damage to the hood and or your aquarium kit.









DO NOT MOUNT TO DRY WALL

Additional hardware and tools required: Anchors, drill and a screwdriver.
Approximate weight of hoods: 24in = 12 lbs, 36in = 16 lbs & 48in = 21 lbs

1. Undo lock nut. (A)
2. Locate a wood beam in the ceiling. Using the mounting brackets drill 2 pilot holes in the intended locations. Secure directly to the wood beam. (B)

NOTE: If using anchors to secure in the mounting brackets and wavepoint light hood. Use and follow the directions provided with the anchors for proper installation. If there are any questions or concerns consult a professional electrician or general contractor.

3. Adjust the length of the cable. Cut off or hide excess cable. Secure the end of the cable with the cable stop. (C)
4. Lock the lock nut. (D)
5. Remove the tabs at the end of the track (E) on the top of the hood. Slide mounting bracket onto the track (F). Position them equal distance from the edge. Slide bracket in a minimum of 2in from the edge of the track. (G)
Note: Unit must be disconnected from the power. Replace tabs
6. To level the fixture adjust hanging wire to the desired height by pressing the wire outlet in and sliding cable in and out. (H)
7. Plug the unit directly to an electrical outlet. Do not use extension cords and or power strips!

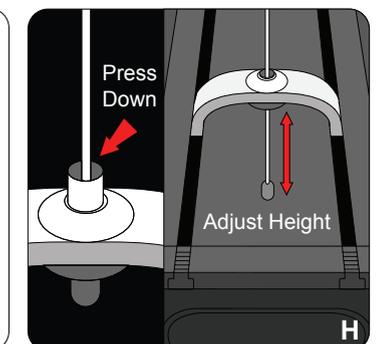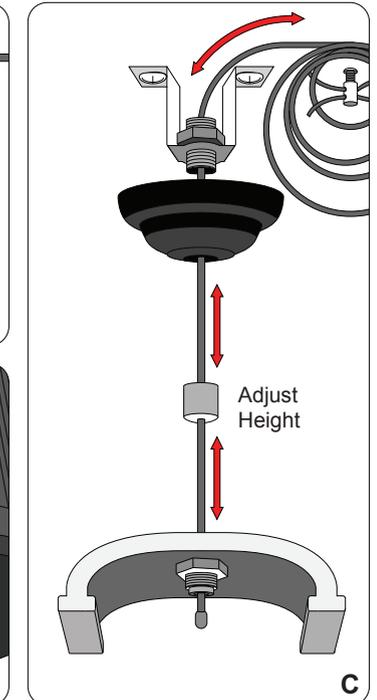

WavePoint® Technology, Inc.
www.wave-point.com

©2010 WavePoint® Technology, Inc. Photo: ©WavePoint®

Made in China. All rights reserved.

Specifications are subject to change without notice